

**HARDWARE REQUIRED
(Without Spares)**


- (22) 1/2" Anchor Shackles
- (22) 5/8" Anchor Shackles
- (12) 3/4" Anchor Shackles
- (1) 7/8" Anchor Shackle
- (1) Edgetech Release Link
- (3) 1/2" Sling Links
- (28) 3/4" Sling Links
- (4) 3/8" Screw Pins
- (1) 1" Screw Pin

FOR ALL *
Label cable __m
from upper swage.
Clearly mark upper
swage as "TOP".

- * 19.7 m ← 40 m → T-Pod
- * 39.7 m ← 60 m → T-Pod **77.8 m 5/16" Jac Nil WR**
- * 59.7 m ← 80 m → T-Pod
- 100 m (H) 300 kHz Workhorse ADCP/Seacat
- * 20 m ← 120 m → T-Pod **38.6 m 5/16" Jac Nil WR**
- 140 m (F) Microcat on Strongback
- 150 m (B) **9.2 m 5/16" Jac Nil WR**
- (B) Aanderra RCM-8 Current Meter
- * 9.8 m ← 160 m → T-Pod **48.4 m 5/16" Jac Nil WR**
- * 29.8 m ← 180 m → T-Pod
- 200 m (F) Microcat on Strongback
- 210 m (B) **9.3 m 5/16" Jac Nil WR**
- (B) Aanderra RCM-8 Current Meter
- * 9.8 m ← 220 m → T-Pod **48.4 m 5/16" Jac Nil WR**
- * 29.8 m ← 240 m → T-Pod
- 260 m (F) Microcat on Strongback
- * 20 m ← 280 m → T-Pod **48.9 m 5/16" Jac Nil WR**
- * 40 m ← 300 m → T-Pod

HARDWARE DESIGNATION

(A)	(2) 1/2" SH, (1) 3/4" SL
(B)	(1) 1/2" SH, (1) 3/4" SL, (1) 5/8" SH
(C)	(1) 1/2" SH, (1) 3/4" SL, (1) 3/4" SH
(D)	(1) 1/2" SH, (1) 3/4" SL, (1) 7/8" SH
(F)	(1) 5/8" SH, (1) 3/4" SL, (1) 3/4" SH
(R)	Release Link, Edgetech
(T)	(1) 3/8" Screw Pin
(U)	(1) 5/8" SH, (1) 1/2" SL, (1) 3/8" Screw Pin
(V)	1" Screw Pin, (2) 1/2" SL, (2) 3/8" Screw Pins

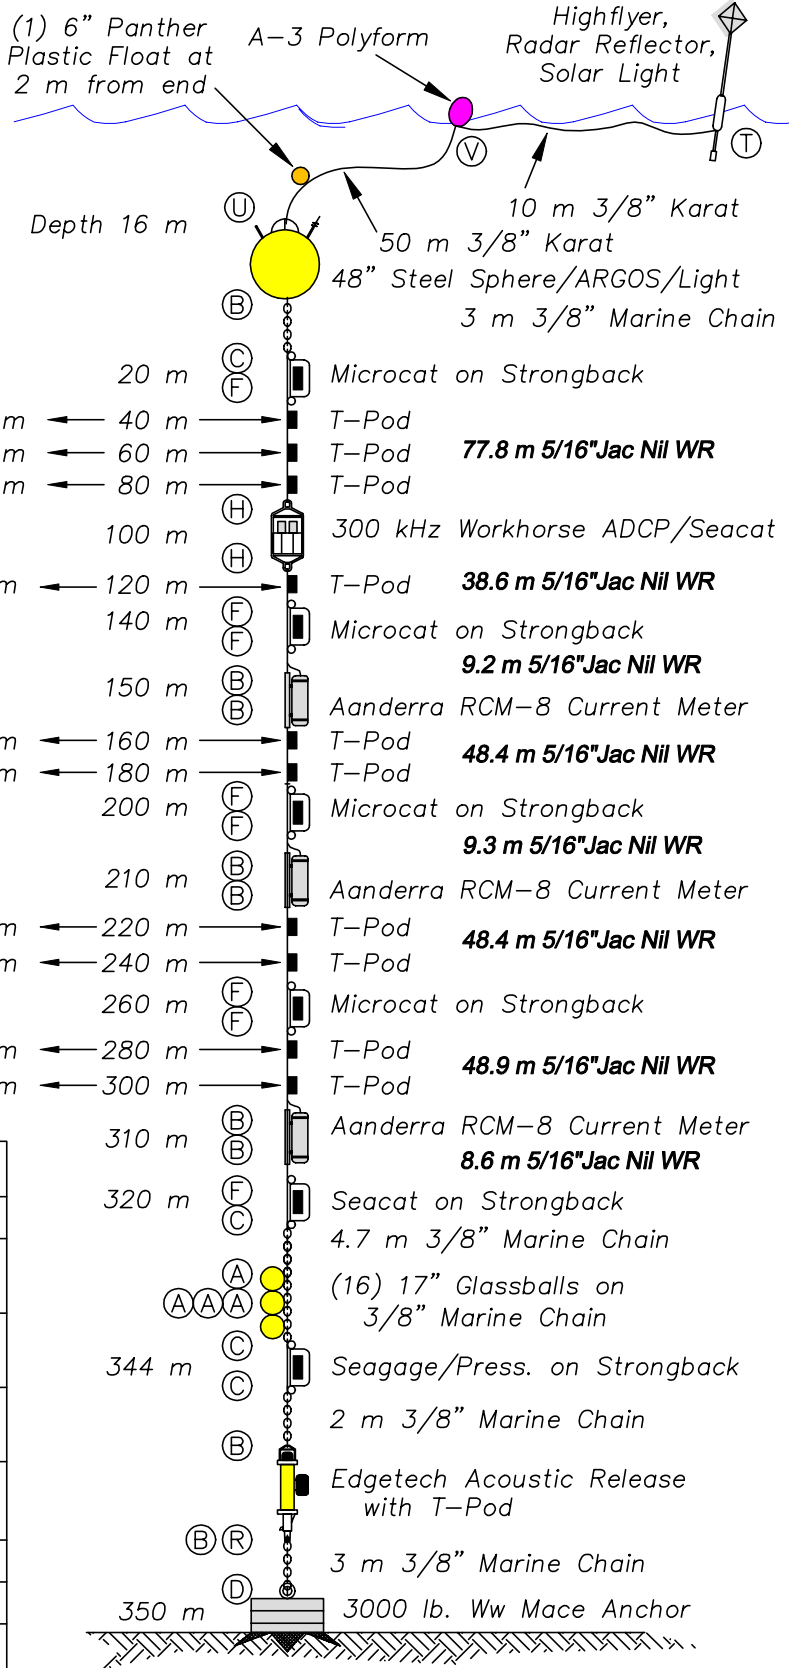

ASIAEX 2001

Offshore Mooring at 350 meters

view 13